



# STATEMENT:



- 1. FOX ESS HAS OFFICIALLY LAUNCHED OUR NEW GENERATION OF V2.0 BATTERY SYSTEM
- 2. IN ORDER TO HELP YOU FAMILIARIZE YOURSELF WITH NEW BATTERY SYSTEM INSTALLATION, FOX WILL PRESENT A COMPREHENSIVE INTRODUCTION ON THE STICKER AND ITS COMPATIBILITY GUIDELINES.

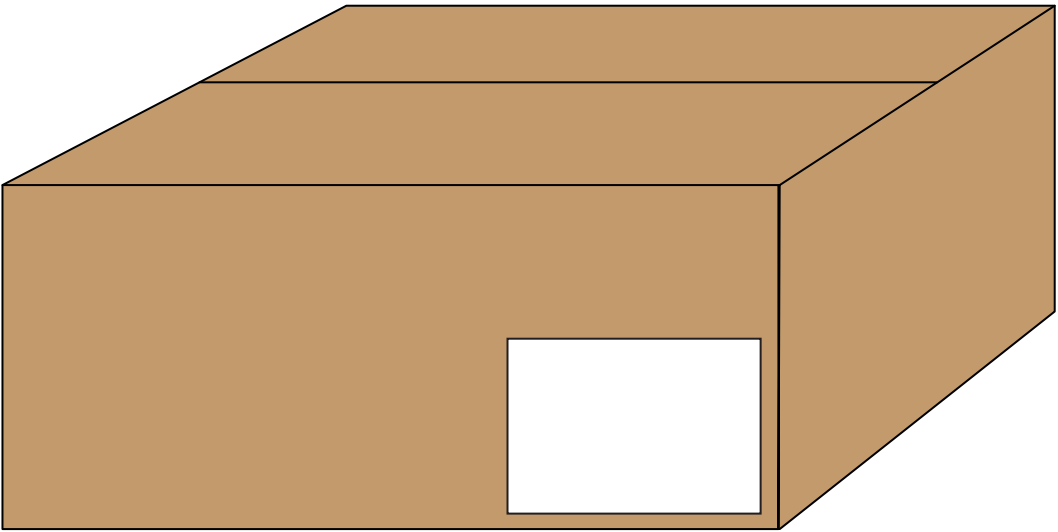

V1.0 BATTERY / BMS

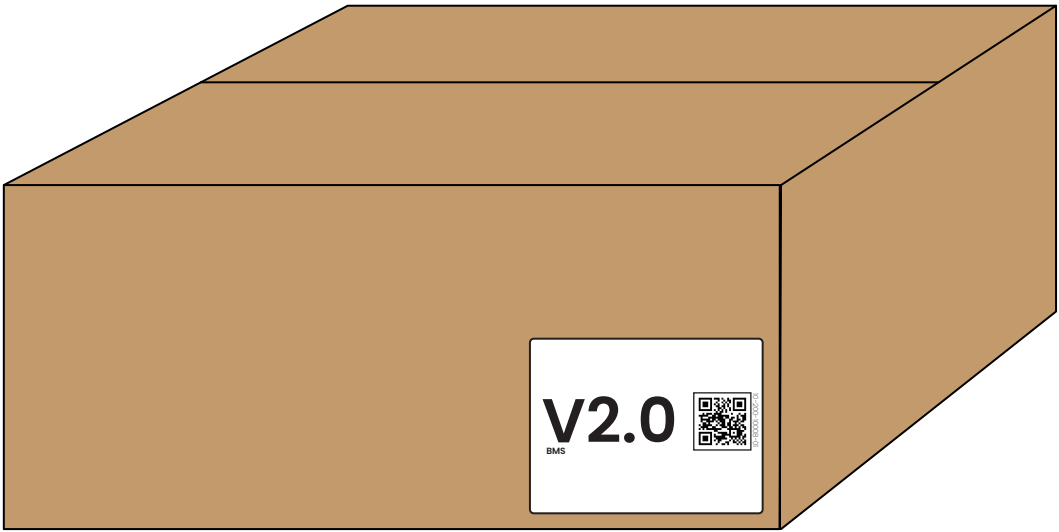


V2.0 BATTERY / BMS

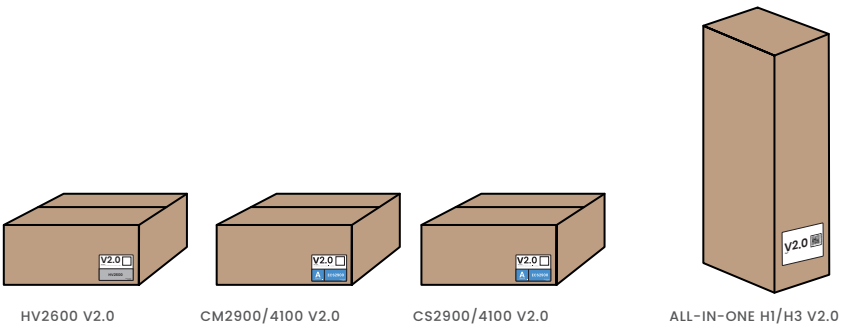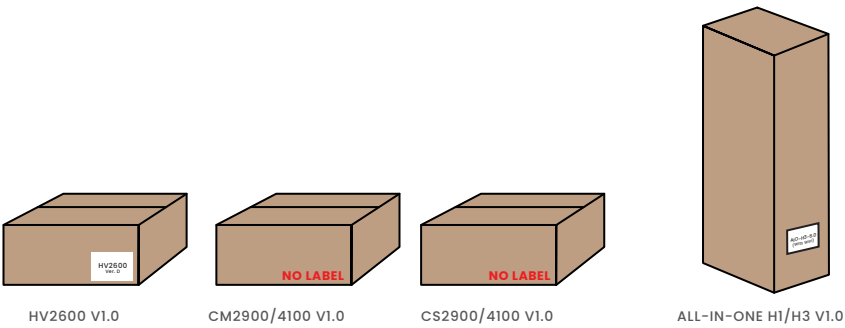

ATTENTION: IF NO V2.0 LABEL, IT IS V1.0

# BMS AND BATTERY MATCHING RULES





**BMS V1.0**  **BATTERY V1.0**

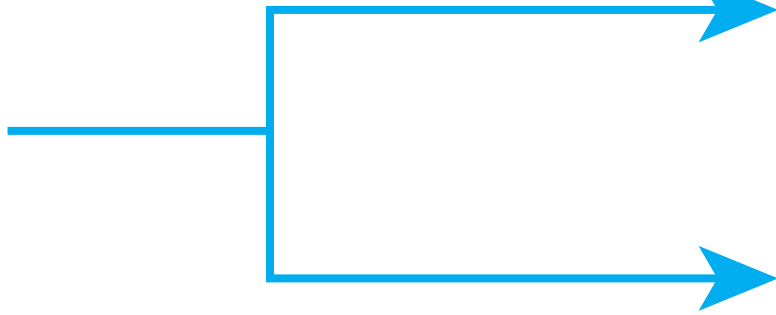**BMS V2.0**  **BATTERY V1.0**  
**BATTERY V2.0**







**BMS V1.0**  **BATTERY V2.0**





EXAMPLE:

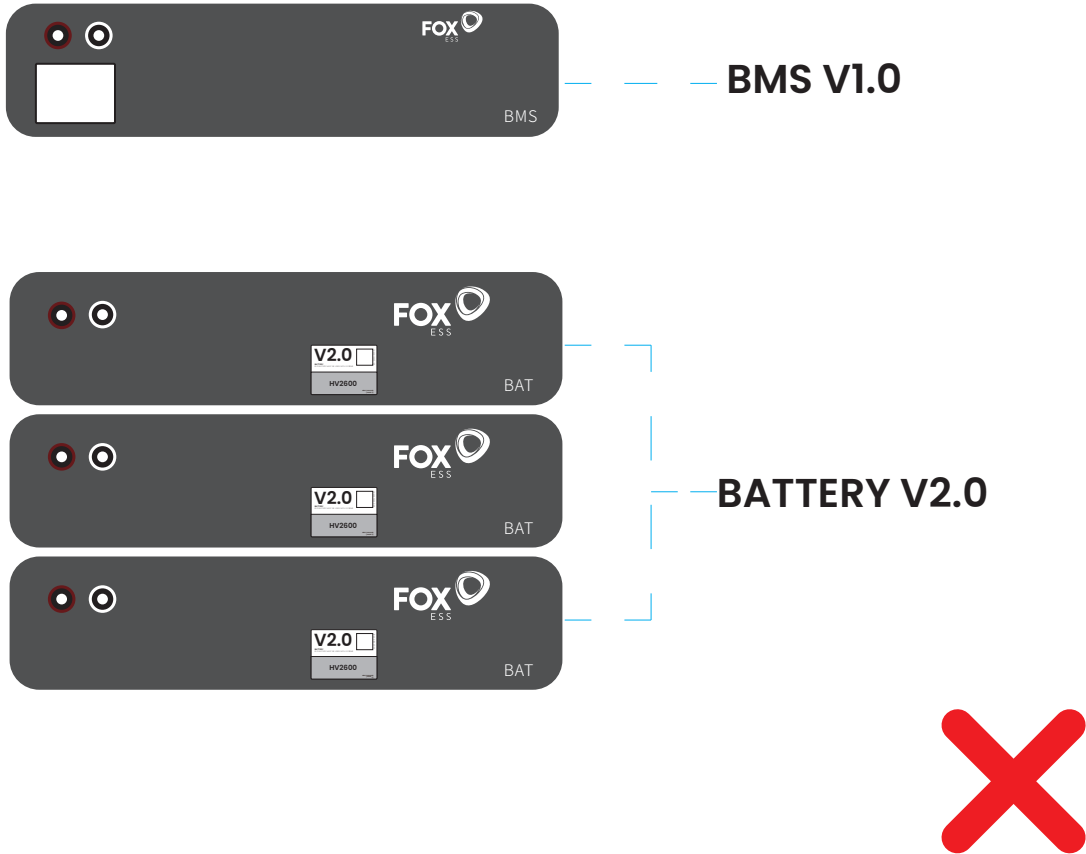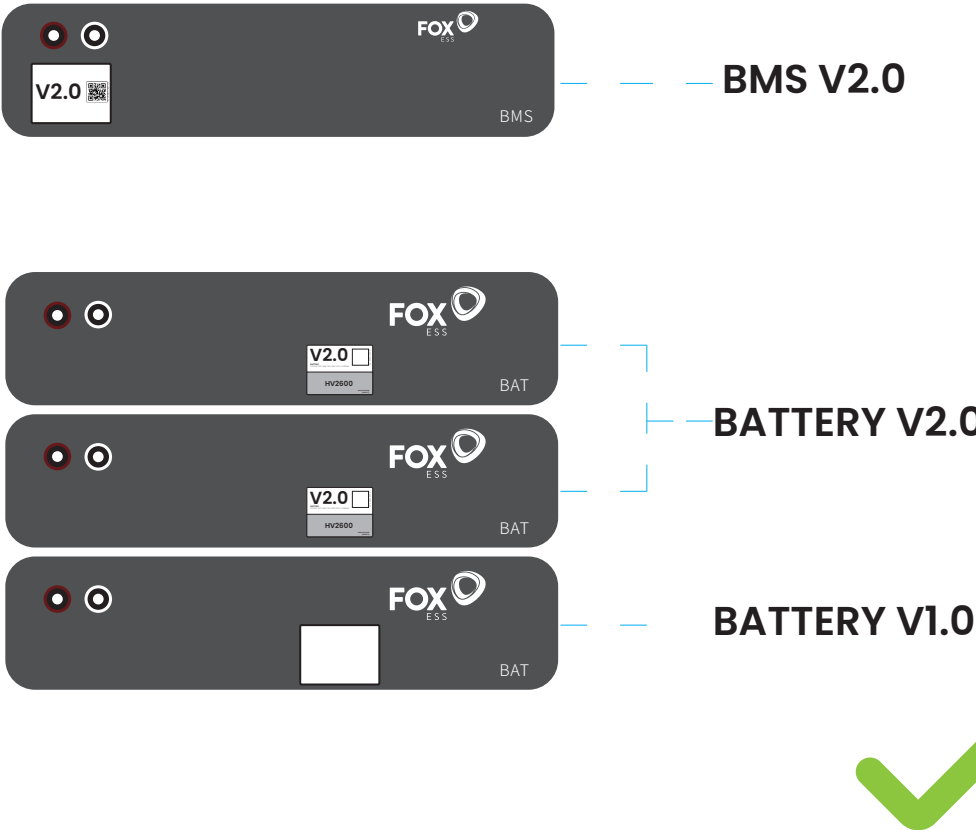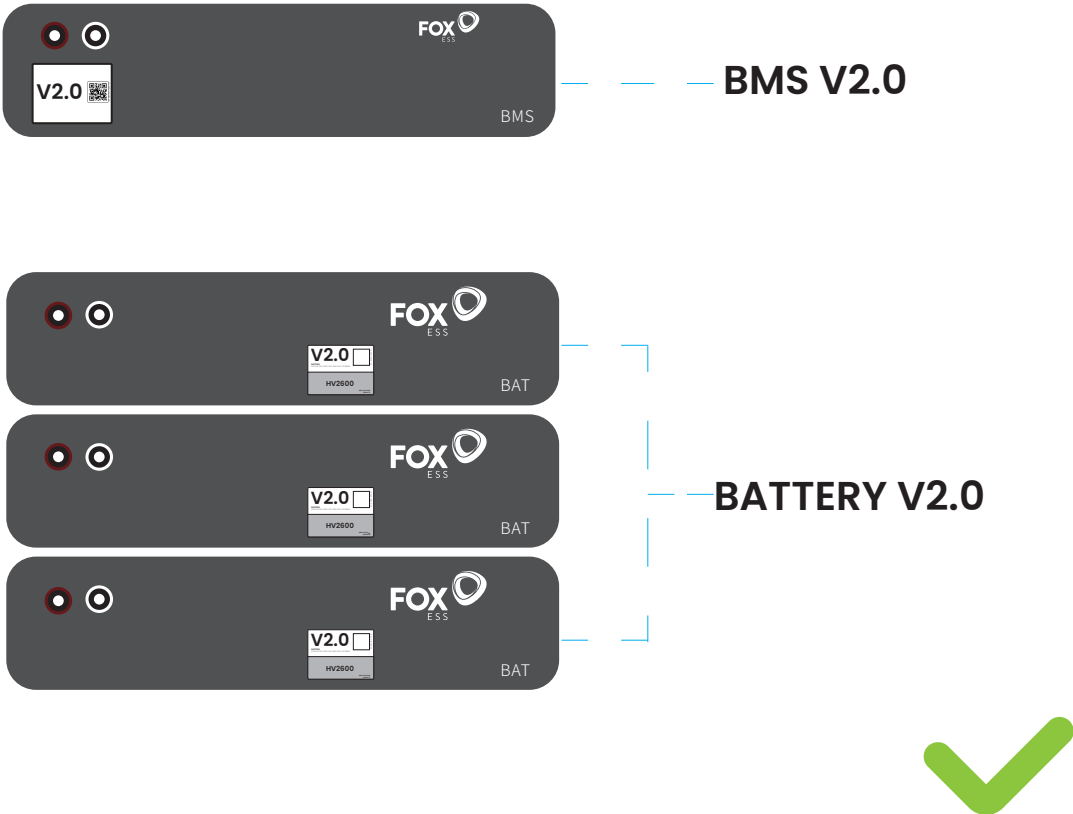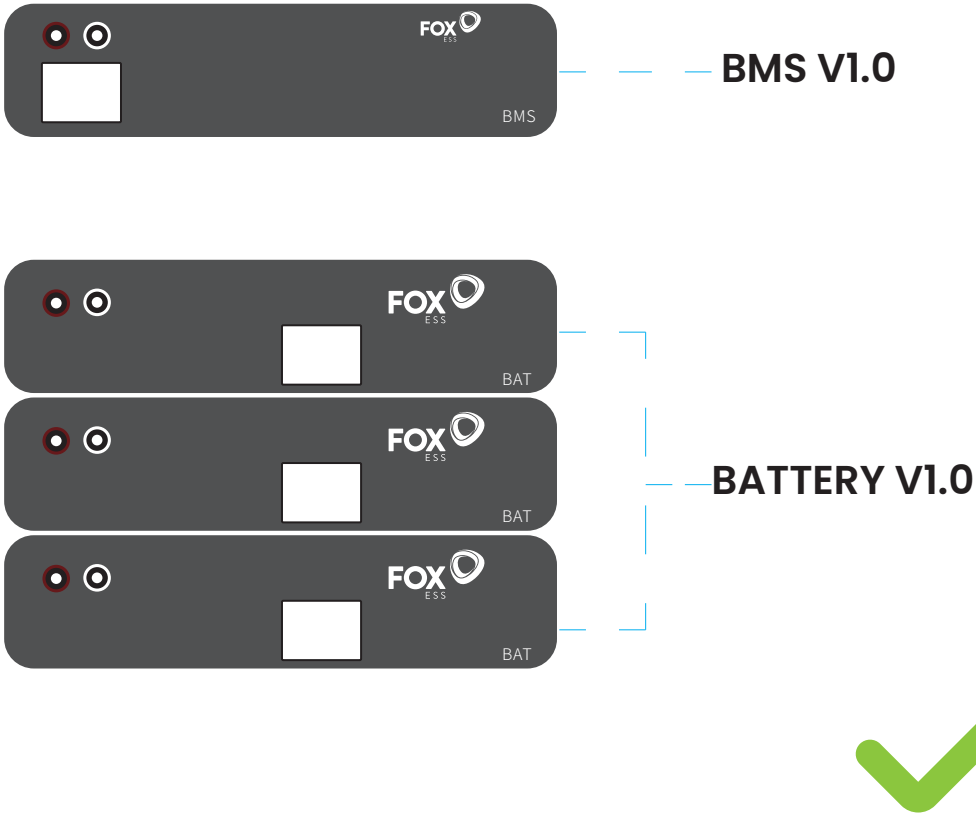

EXAMPLE:

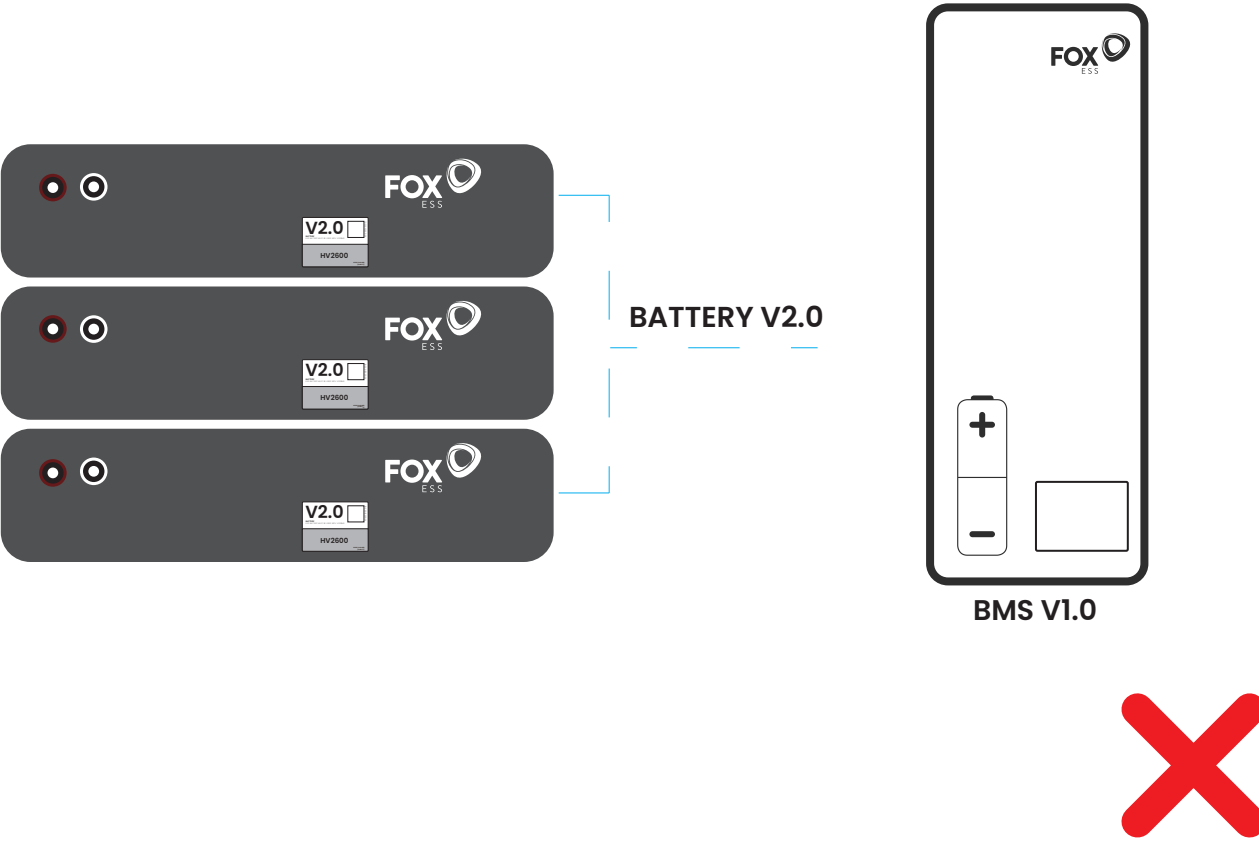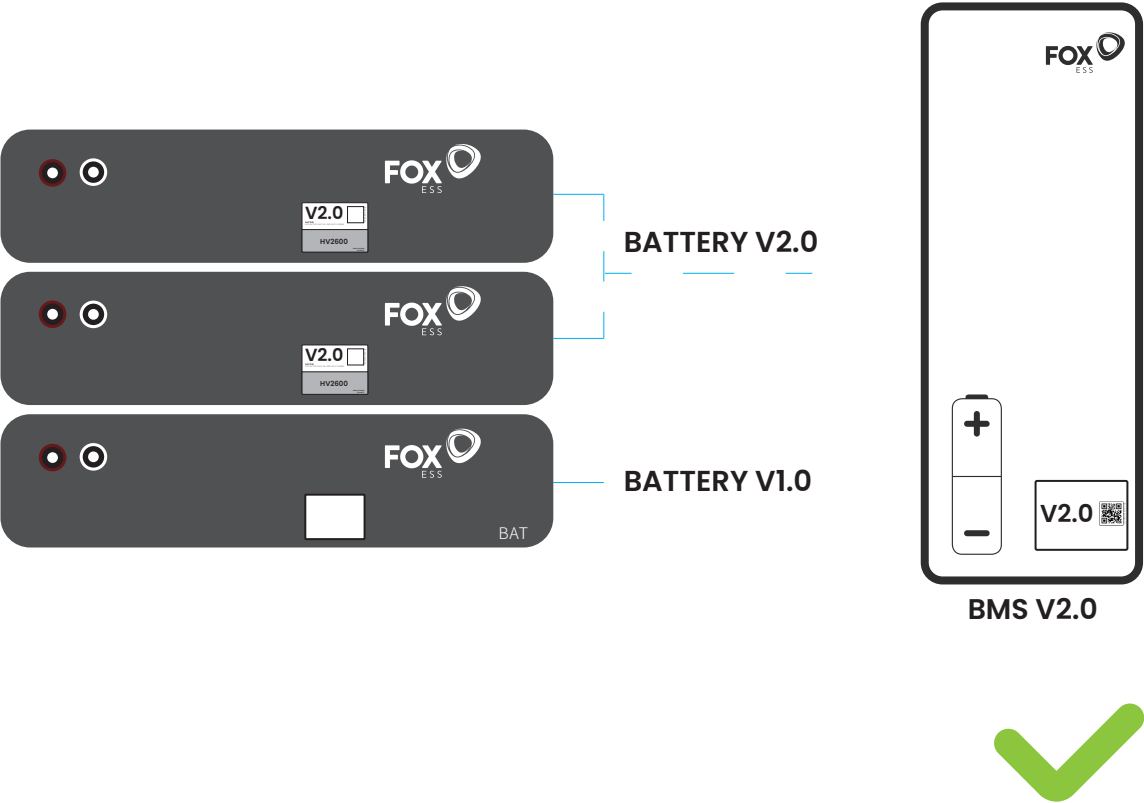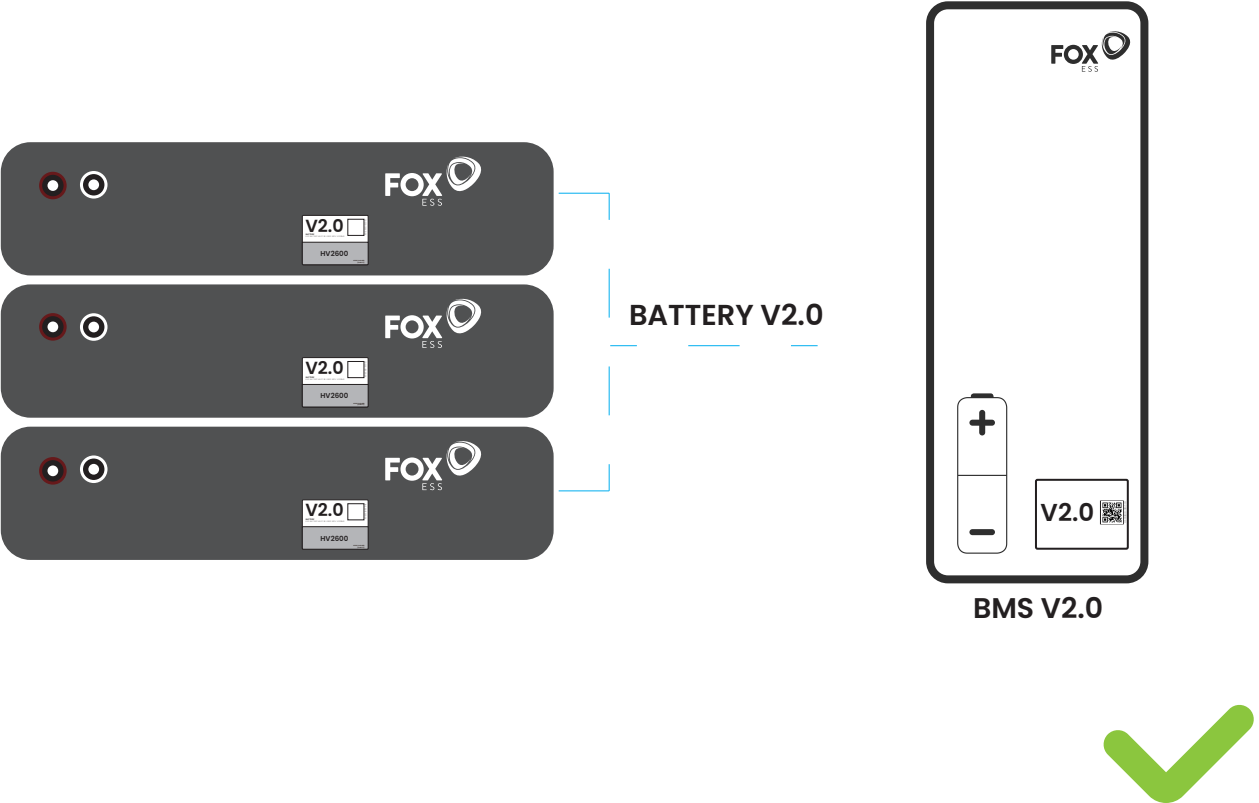
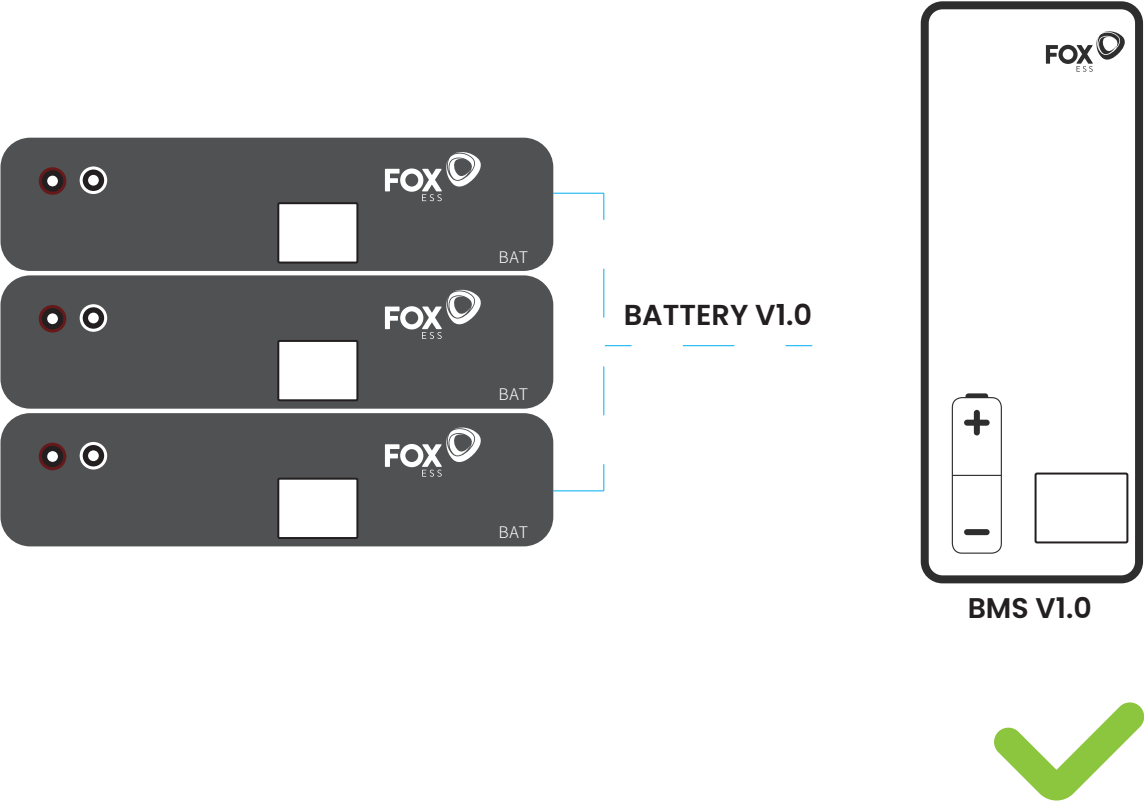


EXAMPLE:

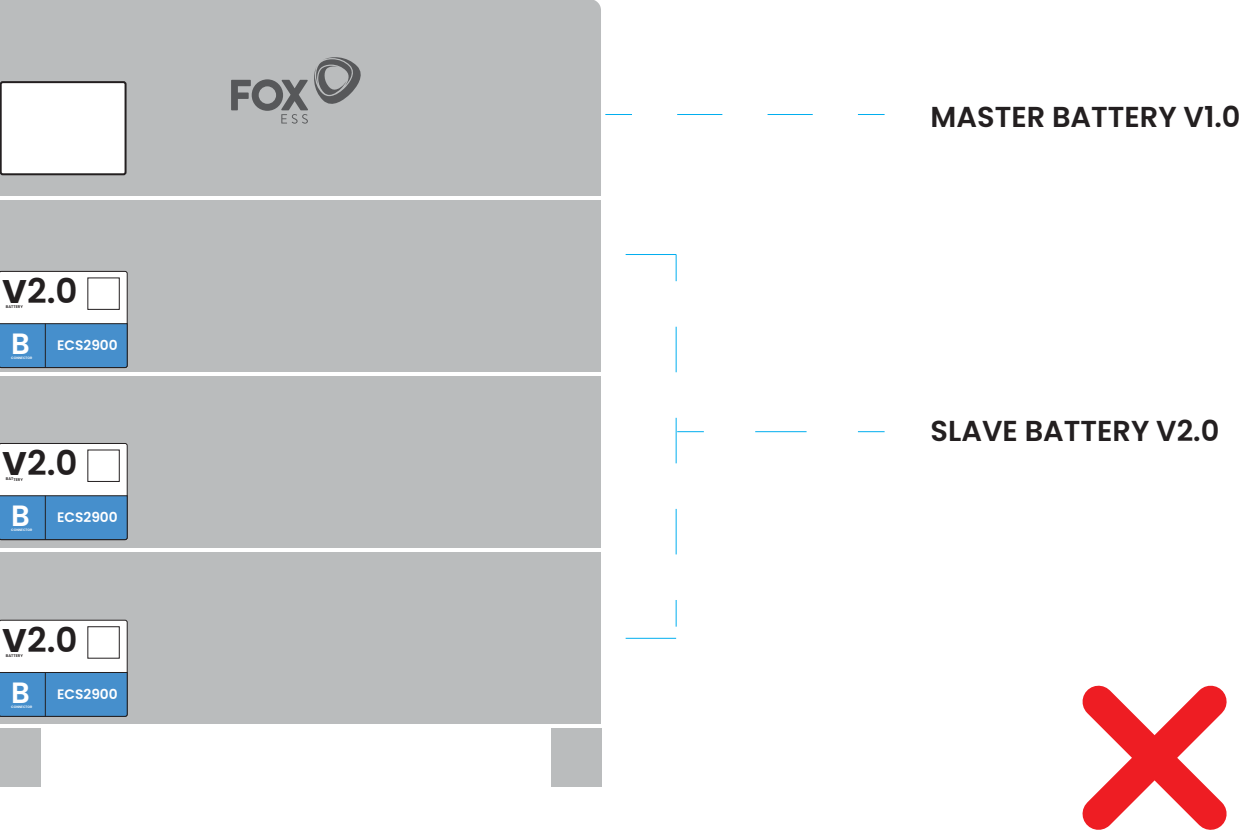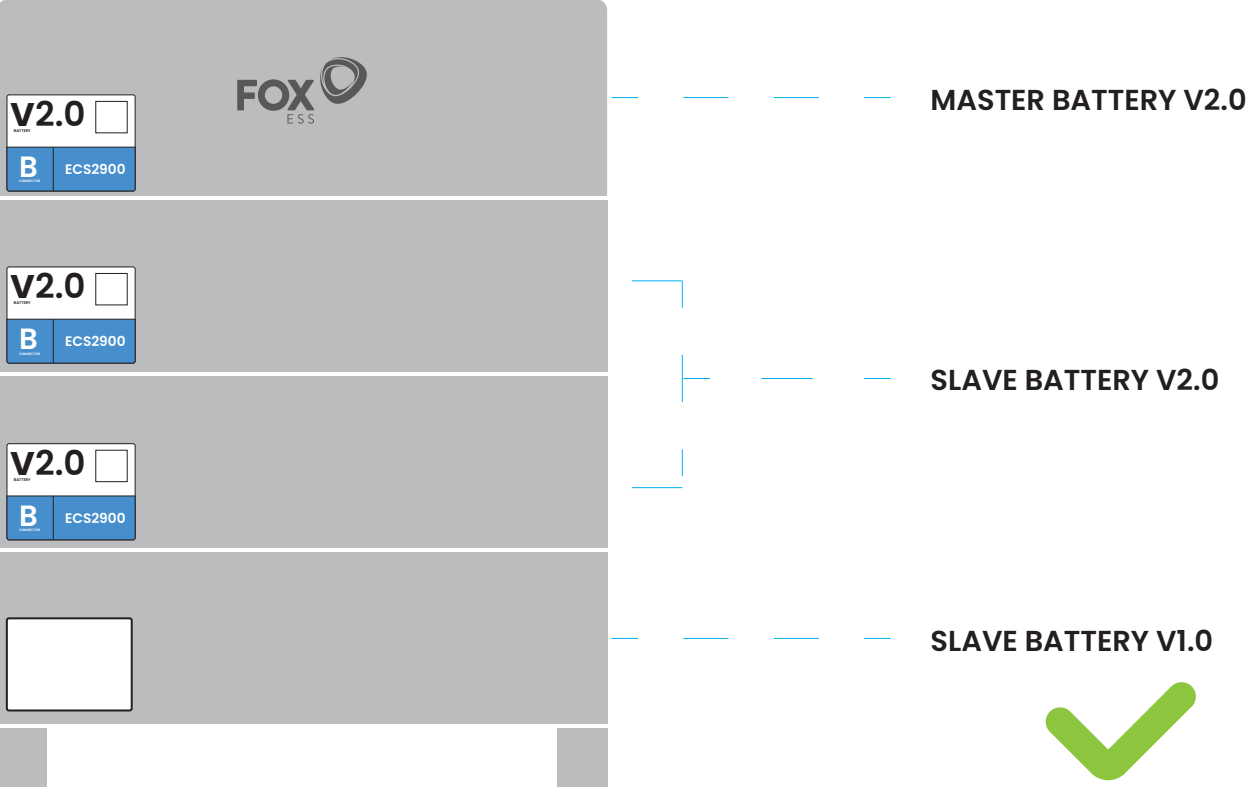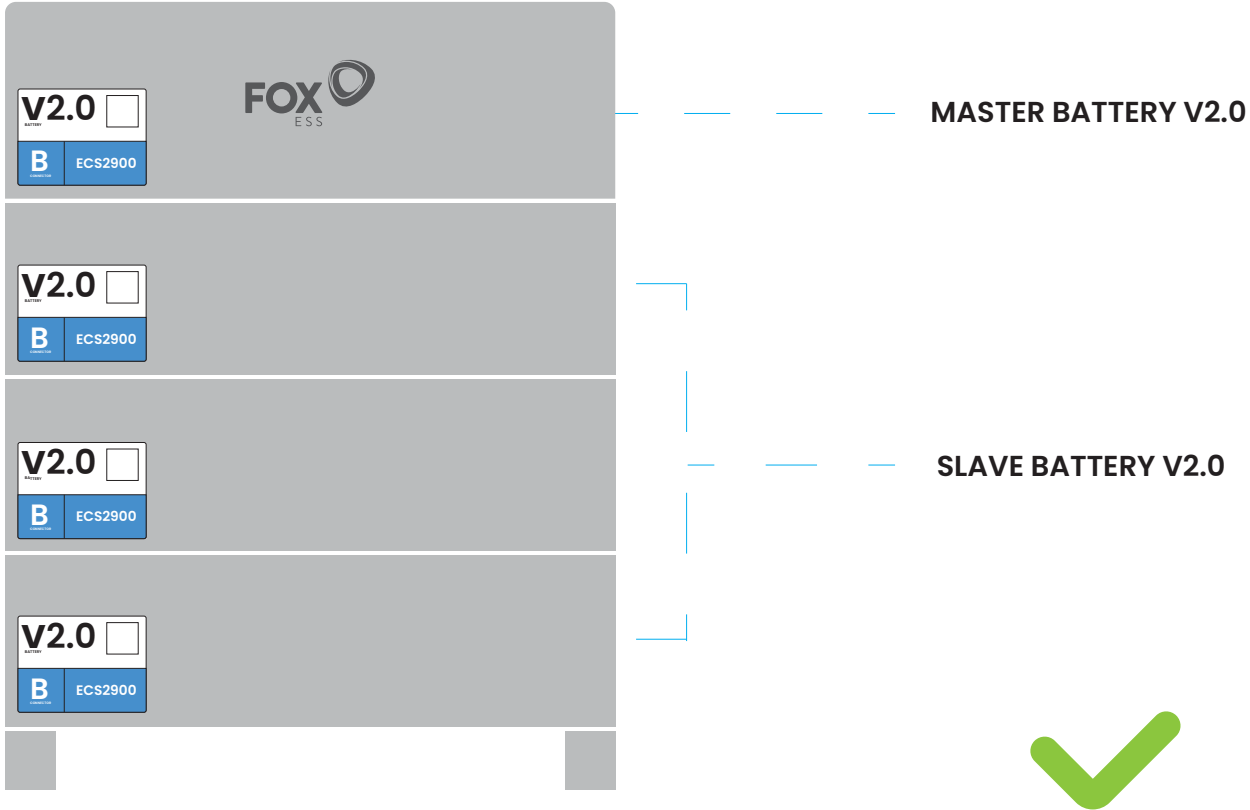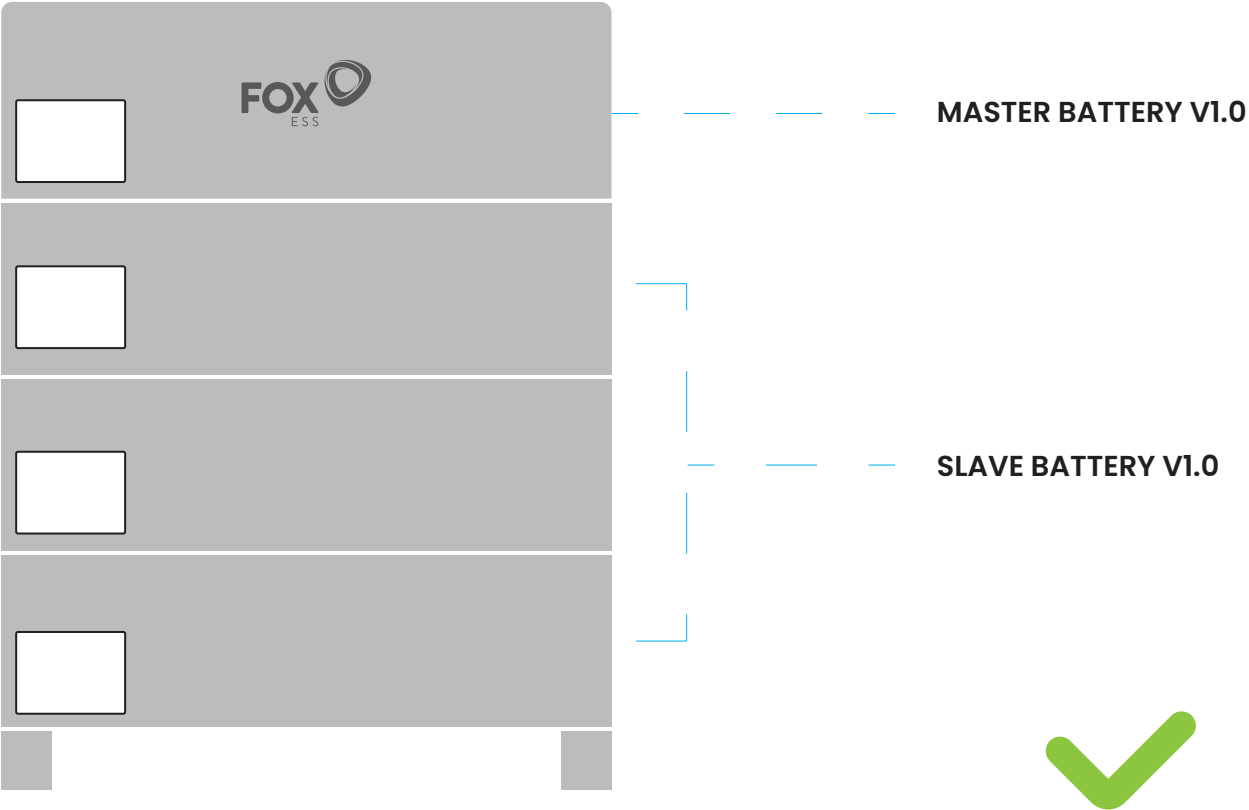

ONLY FOR ENERGY CUBE

# THERE ARE TWO TYPES OF CONNECTORS: A&B THEY CANNOT BE MIXED-UESD

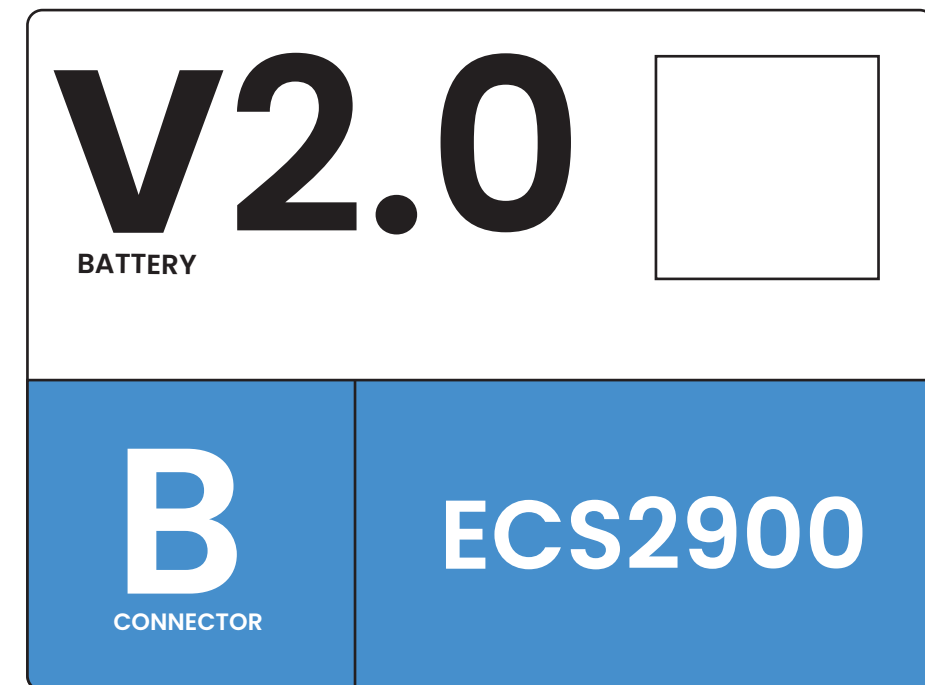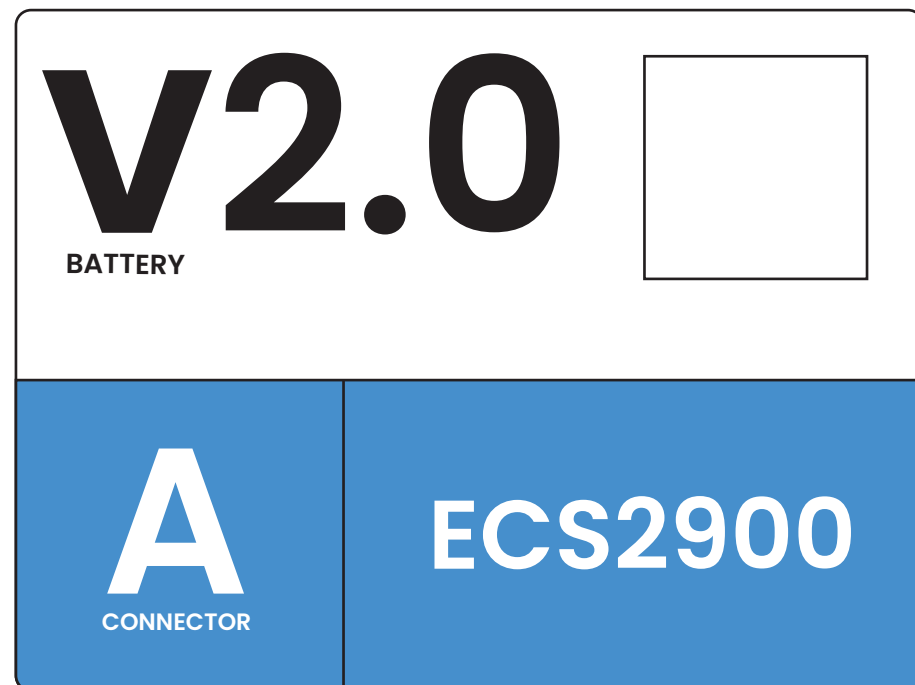

A Connector battery → A Connector battery

B Connector battery → B Connector battery

A Connector battery ~~→~~ B Connector battery

EXAMPLE:

V2.0

A

ECS2900

FOX  
ESS

A

V2.0

A

ECS2900

A

V2.0

A

ECS2900

A

V2.0

A

ECS2900

A

V2.0

A

ECS2900

FOX  
ESS

A



V2.0

B

ECS2900

FOX  
ESS

B

V2.0

B

ECS2900

B

V2.0

B

ECS2900

B

V2.0

B

ECS2900

B

V2.0

B

ECS2900

FOX  
ESS

B



V2.0

A

ECS2900

FOX  
ESS

A

V2.0

A

ECS2900

A

V2.0

A

ECS2900

A

V2.0

B

ECS2900

B

V2.0

B

ECS2900

FOX  
ESS

B



TO REACH THE HIGHEST PERFORMANCE, IT IS RECOMMENDED  
TO USE THE SAME COLOUR CELLS IN ONE SERIE

V2.0

BATTERY

A

CONNECTOR

ECS2900

V2.0

BATTERY

A

CONNECTOR

ECS2900

V2.0

BATTERY

HV2600

V2.0

BATTERY

V2.0 BATTERY MUST BE USED WITH V2.0BMS

A

CONNECTOR

B CONNECTOR BATTERY MUST BE USED WITH ANOTHER B CONNECTOR BATTERY

ECS4100

GREEN COLOUR  
(CODE 4)

V2.0

BATTERY

V2.0 BATTERY MUST BE USED WITH V2.0BMS

MIRA HV25



EXAMPLE:

